

Overview

The Stork standard tooling over available air cylinder sizes


Stork type – Corresponding Ø for air cylinder

170 - 47,863	550 - 168,820	900 - 279,979	1260 - 394,570
200 - 57,412	560 - 172,004	910 - 283,162	1270 - 397,754
210 - 60,595	570 - 175,187	920 - 286,345	1280 - 400,937
220 - 63,778	580 - 178,370	930 - 289,528	1290 - 404,120
230 - 66,961	590 - 181,553	940 - 292,711	1300 - 407,303
240 - 70,144	600 - 184,736	950 - 295,894	1310 - 410,486
250 - 73,327	610 - 187,919	960 - 299,077	1320 - 413,669
260 - 76,510	620 - 191,102	970 - 302,260	1330 - 416,852
270 - 79,693	630 - 194,285	980 - 305,444	1340 - 420,035
280 - 82,877	640 - 197,468	990 - 308,627	1350 - 423,218
290 - 86,060	650 - 200,651	1000 - 311,811	1360 - 426,401
300 - 89,243	660 - 203,835	1010 - 314,993	1370 - 429,585
310 - 92,426	670 - 207,018	1020 - 318,176	1380 - 432,769
320 - 95,609	680 - 210,201	1030 - 321,359	1390 - 435,951
330 - 98,792	690 - 213,384	1040 - 324,542	1400 - 439,134
340 - 101,975	700 - 216,567	1050 - 327,726	1410 - 442,317
350 - 105,158	710 - 219,750	1060 - 330,908	1420 - 445,500
360 - 108,342	720 - 222,934	1070 - 334,092	1430 - 448,683
370 - 111,525	730 - 226,116	1080 - 337,275	1440 - 451,866
380 - 114,708	740 - 229,300	1090 - 340,458	1450 - 455,049
390 - 117,891	750 - 232,482	1100 - 343,641	1460 - 458,232
400 - 121,074	760 - 235,666	1110 - 346,824	1470 - 461,416
410 - 124,257	770 - 238,849	1120 - 350,007	1480 - 464,599
420 - 127,440	780 - 242,032	1130 - 353,190	1490 - 467,782
430 - 130,623	790 - 245,215	1140 - 356,373	1500 - 470,965
440 - 133,806	800* - 248,398	1150 - 359,556	1510 - 474,148
450 - 136,989	810* - 251,331	1160 - 362,739	1520 - 477,331
460 - 140,173	810 - 251,582	1170 - 365,923	1530 - 480,514
470 - 143,356	820 - 254,514	1180 - 369,106	1540 - 483,697
480 - 146,539	830 - 257,697	1190 - 372,289	1550 - 486,880
490 - 149,722	840 - 260,880	1200 - 375,472	1560 - 490,063
500 - 152,905	850 - 264,064	1210 - 378,655	1570 - 493,247
510 - 156,088	860 - 267,246	1220 - 381,838	1580 - 496,430
520 - 159,271	870 - 270,430	1230 - 385,021	1590 - 499,613
530 - 162,454	880 - 273,613	1240 - 388,204	1780 - 560,092
540 - 165,637	890 - 276,796	1250 - 391,387	-

* Both diameters are common

Overview

All available stainless steel reinforced notches

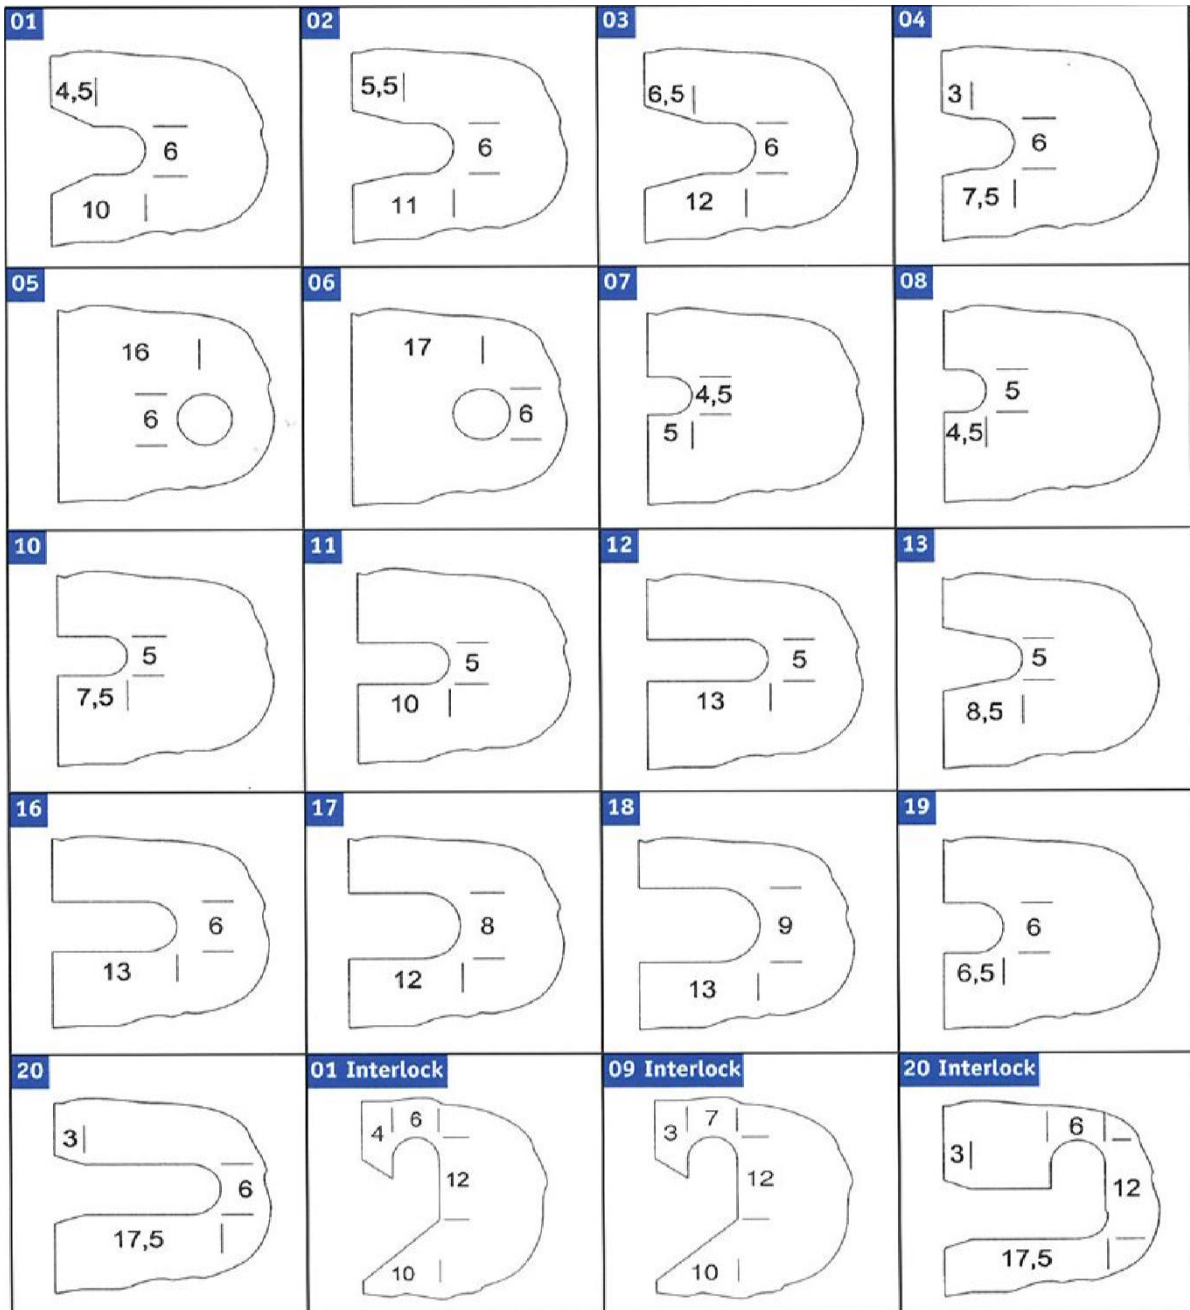

Measurements in mm.

The interlock notches are only for Adapter sleeves.