



rotec[®] Lightweight Sleeve

Lightweight sleeve with up to 40% weight reduction and 100% quality

Available in wall thicknesses from 19 mm to 100 mm – Special sizes available on request

Product Advantages

- Lightweight construction: up to 40% weight reduction, compared to similar products in the market
- Improved mounting characteristics: less linear load
- New intermediate layer polyurethane foam for highest thermal resistance and lower weight
- High quality printing

Product Features


- Aluminium end plates providing edge sealing for a long service life and extra protection of sleeve build-up against cleaning liquids, ink residues and humidity
- Available with Ω -Technology*
- Extremely durable, scratch and solvent resistant polyurethane surface (75 Shore D)
- High precision grinding TIR ≤ 0.02 mm (measured on carrier cylinder at TIR ≤ 0.005 mm)
- Proven rotec[®] interior design of synthetic resin and fibre compound assures long-lasting and consistent mounting characteristics
- Tolerance of face length according to DIN ISO 2768 T1 c

Manufactured in Germany

* The regulations of ATEX EU Directive No. 2014/34/EU (formerly ATEX 95) concerning electrostatic derivation ability are fulfilled.

rotec® Lightweight Sleeve

Weight Comparison

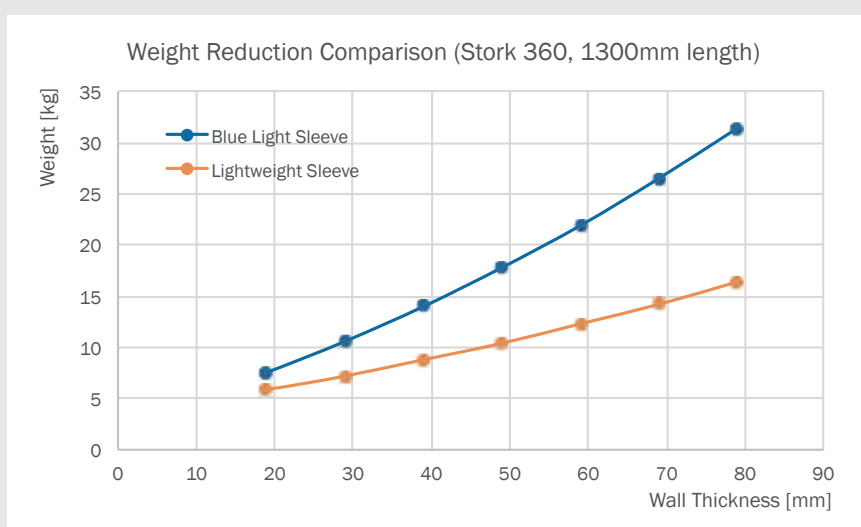

Product Specifications

Field of Application	Mid-web, Wide-web
Wall Thickness	From 19 mm to 100 mm (special sizes are available on request)
Face Length	From 600 mm to 2600 mm (special sizes are available on request)
Tolerances	High-precision grinding (TIR ≤ 0.02 mm) (measured on carrier cylinder at TIR ≤ 0.005 mm) Tolerance of face length according to DIN ISO 2768 T1 c

Please contact our Customer Service for additional information.

Flint Group
Solmsstraße 83
48683 Ahaus
Germany

T +49 2561 9826 801
F +49 2561 9826 789
info.flexo@flintgrp.com
www.flintgrp.com

The aim of our technical documents is to inform and advise our customers. The information provided herein is correct to the best of Flint Group's knowledge. No liability for any errors, facts or opinions is accepted. Customers must satisfy themselves as to the suitability of this product for their application. No responsibility for any loss as a result of any person placing reliance on any material contained herein will be accepted. Product names followed by ® are trademarks registered by Flint Group (represented by Flint Group US LLC or Flint Group Germany GmbH)